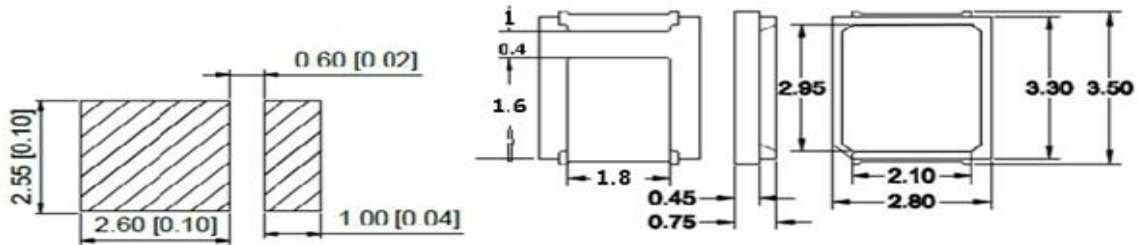


Features:

- Popular 2835 package with thermal pad
- Extremely wide viewing angle
- Suitable for Reflow Solder Process & SMT Assembly
- Available on Tape and reel.
- Moisture sensitivity level: Level 4
- RoHS compliant (RoHS).

**Extremely Cost Effective for TubeLights/Bulbs**

Part No.	Dice	Encapsulation Color	Luminous intensity (mcd) @60mA		Luminous Flux (lm) @60mA		Viewing Angle
			Min	Typ	Min	Typ	
KL2835w	White	Yellow	6500	7100	26	30	120
KL2835WW	Warm White	Diffused	2700	3000	28	28	120

Absolute Maximum Ratings at Ta = 25° C


Parameter	Symbol	Rating	Units
Power Dissipation	pd	210	mW
Forward current	IF	90	mA
Peak Forward Current (I)	IFP	150	mA
Reverse Voltage	VR	5	V
Electrostatic Discharge (HBM)	ESD	1000	V
Operating temperature	Topr	~40 ~+85	°C
Storage Temperature	Tstg	~ 40 ~ +85	°C

Electrical/ Optical Characteristics At Ta =25- °C


Parameter	Symbol	Min	Typ	Max	Units	Test Conditions
Forward voltage	Vf	2.8	3.1	3.4	V	IF=60mA
Reverse Current	IR	--	--	10	uA	VR=5V
Color Temperature	Tc	--	6000/3000	--	K	IF=60mA
Color Rendering Index	CRI	70	---	82	Ra	IF=60mA

Typical optical characteristics curves


Ambient Temperature vs. Forward Current

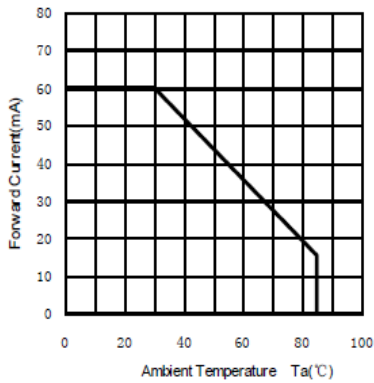


Forward Current VS. Relative Intensity

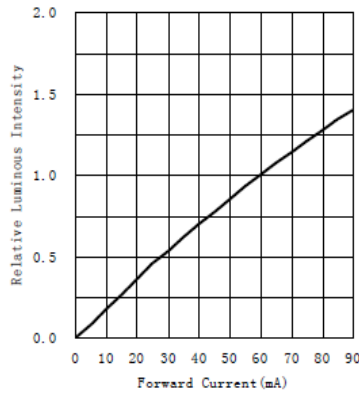


Forward Voltage VS. Forward Current

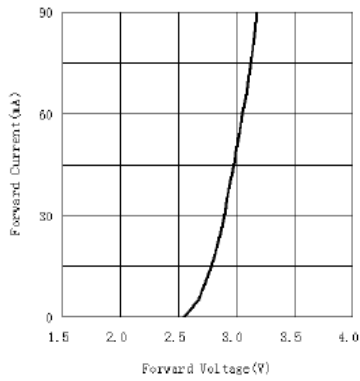


Ambient Temperature VS. Relative Intensity

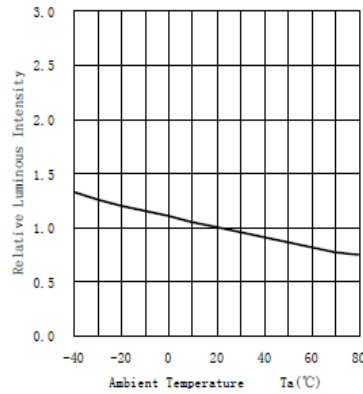

Relative spectral emission

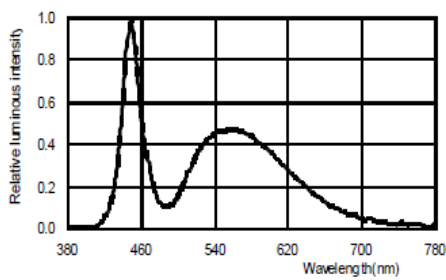

Radiation diagram

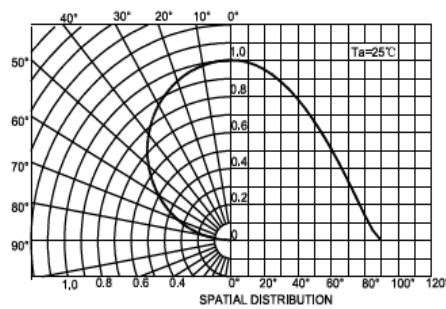

kwalitiy

ISO 9001-2008 29, EC Kushaiguda, Hyderabad-50 062, INDIA. PH:91-040-27123555,27136252

Email: sales@kwalitiyindia.com www.kwalitiyindia.com

KPDS/Ds92 SMD LED KLSL2835 new Rev02

Dt.25.05.16